

Features

Honda GX630 engine

You expect the best; you get the best. The Honda GX630 is better than ever. Including improved adaptability, quieter operation, and greater fuel efficiency.

Low oil protection

In the event there is low-oil level, the engine will shut down, which will protect the engine from damage.

Powder coat paint

For an incredibly durable finish.

Sturdy wrap-around welded tubular cradle

We use 13 gauge steel to provide industrial strength support.

15 gallon fuel tank

The EPA approved steel fuel tank design eliminates hydrocarbon emissions.

Premium Square D circuit breakers

Providing clear and instant identification of a tripped circuit with a Visi-Trip indicator.

100% load tested

You won't find statistical sampling here. We load test every generator before it leaves our facility.

INDUSTRIAL




12,000 Surge Watts

10,800 Continuous Watts



NEMA 5-20R 20A

NEMA 14-60R 60A

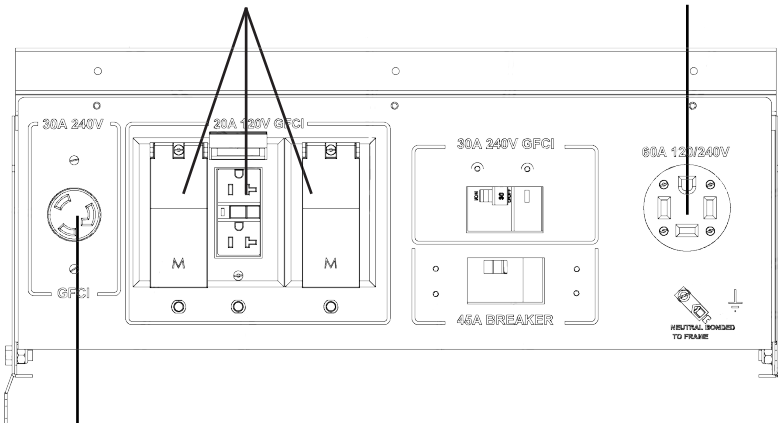

NEMA L6-30R 30A

Optional Accessories

Four wheel, flat-free dolly kit

Portability is important to get your generator where it needs to be.

Generator cover

When your generator is not in use, you will want to keep it dust and debris free.

Plug-in line voltage monitor

For when you want to verify the voltage output.

WINCO emergency transfer service kit

You will be able to set up your generator quickly and safely to restore power to critical circuit breakers.

60 amp (NEMA 14-60P) plug

You supply the cord you need. We offer the plug.

Maintenance Kit

Keep the engine at its peak performance to ensure the generator will be ready when needed most.

Battery

GENERATOR

SURGE WATTS	12,000
CONTINUOUS WATTS	10,800
CONTINUOUS AMPS	90/45
OUTPUT	120/240 VAC
VOLTAGE REGULATION	CAPACITOR +/-5%
FREQUENCY REGULATION	+/-3%
MAIN CIRCUIT BREAKER	45 AMP, 240 VAC
BONDED NEUTRAL	YES
120 VOLT RECEPTACLES	(3) NEMA 5-20R 20A (GFCI)
120/240 VOLT RECEPTACLES	(1) NEMA 14-60R 60A
240 VOLT RECEPTACLES	(1) NEMA L6-30R 30A (GFCI)
4-WHEEL DOLLY KIT	OPTIONAL
PROTECTIVE ROLL FRAME	13 GAUGE STEEL
GENERATOR WARRANTY ⁽¹⁾	2 YRS COMMERCIAL

NOTES: (1) For more generator warranty information contact your local WINCO dealer.


SHIPPING

DIMENSIONS (LxWxH)	40" x 27.2" x 26.2"
DIMENSIONS W/ WHEEL KIT	44.64" x 35.96" x 32.94"
NET WEIGHT	382 LBS
SHIPPING DIMENSIONS	50" x 32" x 31"
SHIP WEIGHT	412 LBS
FREIGHT CLASS	70

ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GX630 OHV
ENGINE STARTER	ELECTRIC
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	V-TWIN
DISPLACEMENT/TYPE	688 CC / OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL ⁽¹⁾	10W-30
OIL CAPACITY	2.1 QT
dBA AT 7 METERS	77
FUEL TANK	15 GAL
FUEL GAUGE	YES
FULL LOAD RUN TIME	9 HOURS
HOUR METER	YES
MOTOR STARTING (CODE G) ⁽²⁾	5 HP
EPA APPROVED	YES
CARB APPROVED	YES
CSA APPROVED	NO
UL LISTED	NO
BATTERY SIZE ⁽³⁾	BCI GROUP U1 300 CCA
LIFTING EYE	YES
ENGINE WARRANTY ⁽⁴⁾	3 YRS COMMERCIAL

NOTES: (1) The oil recommended is for normal applications. See operator's manual for the recommended oil for your needs. (2) Code G capacitor start motor. (3) Battery not included (4) Contact your local Honda service center for engine warranty assistance.

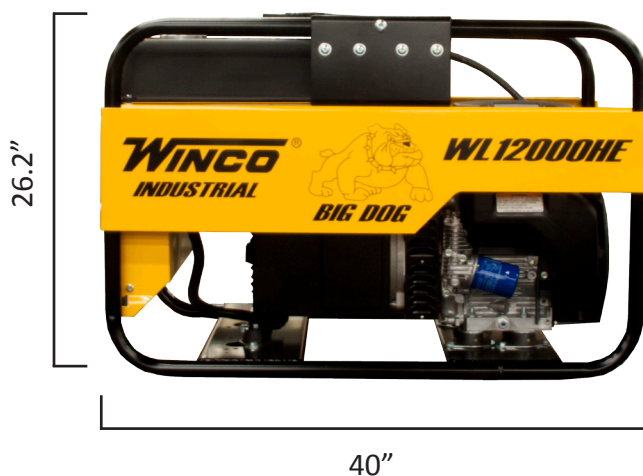

Specifications are subject to change without notice.

225 S. Cordova Ave Le Center, MN 56057 • 1-800-733-2112 • www.wincogen.com